Manual amendments

No.	page	description	issue date
1	1, 2, 16, 26, 35	Manual revision TN 359/15	March 91
2	6, 8, 17	Canopy emergency release, seatback new version ÄM 300/10/E/94	June 94
3	2a, 7.1, 7.2, 7.3	Wingtips with Winglets TN 359/17	Okt. 95
4	1, 2, 4, 9 - 11, 12, 15, 23, 26 (page 15a removed)	TN 359/24 Reduction of operating limitations	April 2007

Section	Content	page	issued	replaced	replaced	replaced
1.	**General**					
1.1	3-Side view	3	Dec. 87			
1.2	Description	4	Dec. 87	April 07		
	"	5	Dec. 87			
1.3	Description of the cockpit the controls and details	6	Dec. 87			
	"	7	Dec. 87			
	"	8	Dec. 87			
Beginning of JAR 22 required and LBA						
2.	**Operating limitations**					
2.1	Airworthiness Category	9	Dec. 87	April 07		
2.2	Approved flight regimes	9	Dec. 87	April 07		
2.3	Required minimum equipment	9	Dec. 87	April 07		
	placards	10	Dec. 87	April 07		
2.4	Airspeed limits	11	Dec. 87	April 07		
2.5	Maximum G-loadings	12	Dec. 87	April 07		
2.6	Weights	12	Dec. 87	April 07		
2.7	Center of gravity locations	12	Dec. 87	April 07		
2.8	Loading chart	13	Dec. 87			
	"	14	Dec. 87			
	"	15	Dec. 87	April 07		
2.9	Tow Release	16	Dec. 87	March91		
2.10	Weak Links	16	Dec. 87	March91		
2.11	Tire Pressure	16	Dec. 87	March91		
2.12	Crosswinds	16	Dec. 87	March91		
2.13	Length of towing cable	16	Dec. 87	March91		
3.	**Emergency procedures**					
3.1	Spin recovery	17	Dec. 87	June 94		
3.2	Canopy jettison/Bailout	17	Dec. 87	June 94		
3.3	Recovery from unintentional cloud flying	17	Dec. 87	June 94		
3.4	Landing wheel up	17	Dec. 87	June 94		
3.5	Rain and icing	18	Dec. 87			
3.6	Leaking water tanks	18	Dec. 87			

Section	Content	page	issued	replaced	replaced	replaced
4.	**Normal operation**					
4.1	Daily Inspection	19	Dec. 87			
4.2	Cockpit Check	20	Dec. 87			
4.3	Aero tow - winch launch	21	Dec. 87			
4.4	Free flight	22	Dec. 87			
4.5	Cloud flying	22	Dec. 87			
4.6	Aerobatics Category "U"	23	Dec. 87	April 07		
4.7	Approach and Landing	24	Dec. 87			
4.8	Flight with water ballast	25	Dec. 87			
4.9	Flight at high altitude and at low temperature	26	Dec. 87	March91	April 07	
4.10	Flight in rain	26	Dec. 87	March91	April 07	
End of JAR 22 required and LBA approved part						
5.	**Rigging and derigging**					
5.1	Rigging	27	Dec. 87			
5.2	Filling the wing water ballast tanks	28	Dec. 87			
5.3	Tie Down, Parking	28	Dec. 87			
5.4	Derigging	28	Dec. 87			
5.5	Trailering	29	Dec. 87			
5.6	Service and care	30	Dec. 87			
5.7	Towing on the ground	31	Dec. 87			
			Dec. 87			
6.	**Additional Information**		Dec. 87			
6.1	Gliding performance	32	Dec. 87			
	Gliding performance polar	33	Dec. 87			
	Mc Cready polar	34	Dec. 87			
6.2	Maintenance	35	Dec. 87	March91		
6.3	Repairs and alterations	35	Dec. 87	March91		
6.4	Tow hook	35	Dec. 87	March91		
6.5	Safety harness	35	Dec. 87	March91		
6.6	3000 h Inspection, max.life time	35	Dec. 87	March91		
6.7	Instruments	35	Dec. 87	March91		
6.8	Airspeed calibration	36	Dec. 87			

1.2 Description

The DG-300 Club ELAN is a single place high performance sailplane, with 15 m wingspan, especially designed for use in gliding clubs.

Technical Data

Wing span	15	m	49.2	ft
Wing surface	10,27	m²	110.5	ft²
Aspect ratiog	21,91	/	21.91	/
Length	6,8	m	22.3	ft
Fuselage width	0,63	m	2.07	ft
Fuselage height	0,81	m	2.66	ft
Empty weight with min. equipment approx.	238	kg	525	lbs.
Max. water ballast in the wings	190	kg	420	lbs.
Max. take off weight with fixed landing gear	385	kg	849	lbs.
Max. take off weight with retractable landing gear	450	kg	992	lbs.
Wing loading g (payload 75 kg, 165 lbs.)	31	kg/m²	6.34	lbs/ft²
Max. wing loading with fixed landing gear	37,5	kg/m²	7.68	lbs/ft²
Max. wing loading with retractable landing gear	43,8	kg/m²	8.98	lbs/ft²
Max. speed VNE	250	km/h	135	kts
Stall speedt W/S=32 kg/m², 6.55 lbs/ft²	65	km/h	35	kts

Description of the components

Wings:	GFRP-foam-sandwich-skin GFRP-Rovings
Elevator:	GFRP-skin
Ailerons, horizontal tailplane and rudder:	GFRP-foam-sandwich-skin
Fuselage:	GFRP-skin
Undercarriage:	Retractable, assisted by a gas strut, spring mounted, internal drum brake, fully sealed landing gear box. Tyre: 5.00 - 5 (dia. 362 mm) (14.25 in) 4 PR or 6 PR

2. Operating limitations

2.1 Airworthiness category:
"U" Utility

2.2 **Approved flight regimes**
Airworthiness category "U"
A) **With waterballast**
1. Flight according to VFR (day light)
B) **Only without waterballast**
1. Cloud flying (day light): permitted when properly instrumented see 2.3 (not permitted in the USA and Canada)

Caution: Aerobatics are not permitted

2.3 **Required minimum equipment**
As required minimum equipment only the instruments and equipment specified in the equipment list (see maintenance manual) or in the master equipment list are to install.

a) **General**
Airspeed indicator
Range: 0-300 km/h (O-165 kts)
Speed range markings:

Green arc	90-175 km/h	48-95 kts
Yellow arc	175-250 km/h	95-135 kts
Redline at	250 km/h	135 kts
Yellow triangle (recommended approach speed)	90 km/h	48 kts

Note: The airspeed indicator is to be connected to the front static ports.
Please refer to the calibration curve sect. 6.8.

Altimeter
Altimeter with fine range pointer, 1 turn max. 1000 m (3000 ft)
Four piece symmetrical safety harness
VHF - transceiver
Parachute automatic or manual type or a back cushion approximately 8 cm (3 inches) thick.
Outside air temperature gauge with probe in the landing gear box. Marking blue for temperature below 2°C, (36°F).
Required placards, check lists and this flight manual

b) **In addition for cloud flying** (not permitted in the USA, Canada and Australia):
Magnetic compass
Variometer
Turn and bank

Remark: Experience has shown that the installed airspeed system may be used for cloud flying.

2.3 ff **Limitations placards**

Type: DG – 300 CLUB ELAN
Serial No.: 3E C
Year of construction:

Maximum airspeeds	km/h	kts.
Winch launching	130	70
Aero-tow	175	95
Manoeuvring V_A	175	95
Rough air	175	95
Maximum speed V_{NE}	250	135

Aerobatics are not permitted

Maximum weights:

Category U retractable landing gear	450 kg	992 lbs.
Category U fixed landing gear	385 kg	849 lbs.

Cockpit load (parachute included)
Maximum: 110 kg (242 lbs.)
Minimum 70 kg (154 lbs.)

Gepäck max. 15 kg
baggage max. 33 lbs.

Sollbruchstelle max. 680 da N
rated load max. 1500 lbs.

Reifendruck 2 bar
Tyre pressure 28 psi
Tail wheel

Reifendruck 3,5 bar
Tyre pressure 49 psi
Main wheel

Cockpit Check

1. Lead ballast (for under weight pilot)?
2. Parachute worn properly?
3. Safety harness buckled?
4. Seat back and pedals adjusted?
5. All controls and knobs in reach?
6. Altimeter?
7. Dive brakes cycled and locked?
8. Control check ? (One person at the control surfaces).
9. Trim?
10. Canopies locked?

Altitude	m	0-3000	4000	5000	6000
VNE indicated	km/h	250	243	230	218

Altitude	ft	0-10000	13000	16000	20000
VNE indicated	kts.	135	131	124	117

Other cockpit placards see section 1.3

2.4 **Airspeed limits**

	km/h	kts
Never-exceed airspeed	VNE = 250	135
Maximum airspeed in rough air	VRA = 175	95
Manoeuvring speed Category "U"	VA = 175	95
Maximum airspeed for landing gear operating	VLO = 175	95
Maximum airspeed for aero tow	VT = 175	95
Maximum airspeed for winch launch	VW = 130	70

Remarks

Rough air is air motion such as wave rotors, storm cloud turbulence, dust devils and turbulence that one often encounters near mountain tops.

The manouevring speed is the highest speed at which it is allowed to apply full control deflections. At maximum airspeed only deflections of up to 1/3 full deflection are allowable. Attention must be paid to the fact that at higher altitudes the true airspeed is greater than the indicated airspeed.
This fact has no influence on the strength and the aerodynamic loads on the sailplane. But for flutter prevention the following indicated airspeeds are not to exceed.

Altitude	m	0-3000	4000	5000	6000
VNE indicated	km/h	250	243	230	218

Altitude	ft	0-10000	13000	16000	20000
VNE indicated	kts.	135	131	124	117

2.5 **Maximum G-Loadings**
The following G-Loadings are not to be exceeded:

Airworthiness category "U"
at manoeuvring airspeed VA +5.3 -2.65
at maximum airspeed VNE +4 -1.5

2.6 **Weights**
Empty weight without
instruments: approx. 245 kg 540 lbs.

Maximum weight: category "U" 450 kg 992 lbs.
Maximum weight: category "U" 385 kg 849 lbs. with fix landing gear

The maximum weight without ballast in the wings has to be calculated as follows:

G = GNT + Gwings see weight record page 14

maximum weight for the nonlifting parts:

GNT = 240 kg 529 lbs.

2.7 **Center of gravity locations**
The permissable in-flight center of gravity range is

160 mm to 325 mm


6.3 inches to 12.8 inches


behind datum (leading edge of the wing root rib).

DG-300 Ballastplan

for determination of max. water ballast in the wing tanks

1 kg = 2.2046 lbs.

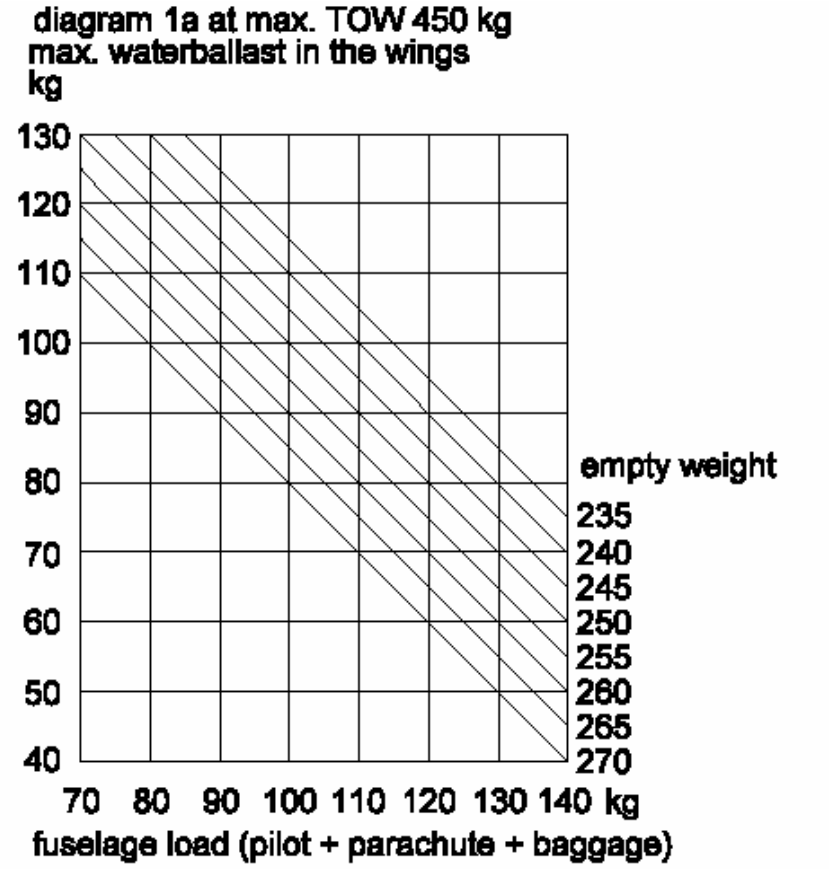

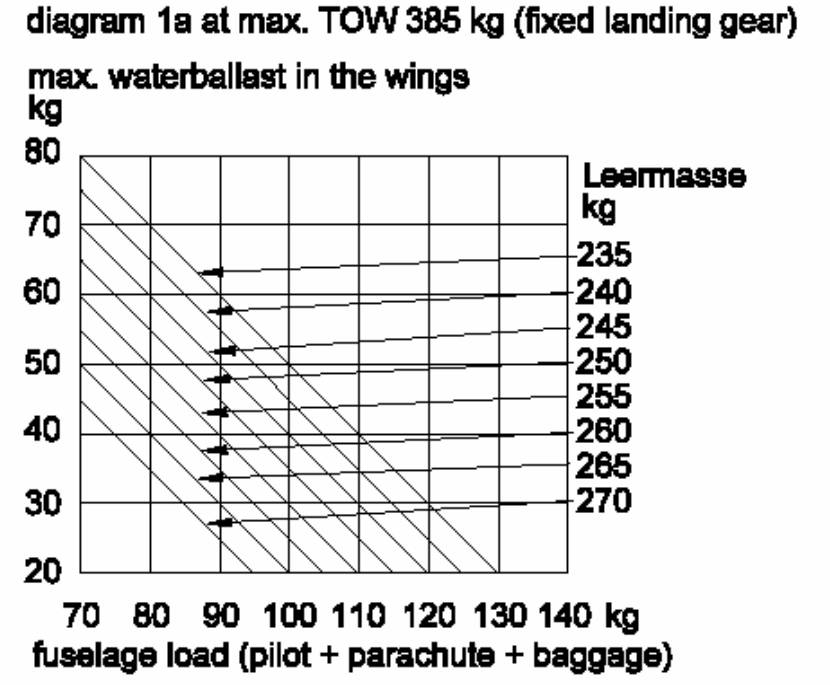

4.6 Aerobatics (Utility Category)

Caution: Aerobatics are not permitted

4.9 **Flight at high altitude and at low temperatures**
With temperatures below 0°C (32°F) for instance when wave flying or flying in winter, it is possible that the control circuits could become stiffer.
Special care should be taken to ensure that there is no moisture on any section of the control circuits to minimize the possibility of freeze up. It could be advantageous to apply Vaseline along all the edges of the airbrake cover plates to minimize the possibility of freezing closed.
Apply the controls in short periods.
It is not allowed to carry waterballast.

Caution:
1. At temperatures below -20°C (-4°F) there is the risk of cracking the Gelcoat.

2. Attention must be paid to the fact at higher altitudes the true airspeed is greater than the indicated airspeed.
The max. speed VNE is reduced. See the following table:

Altitude	m	0-3000	4000	5000	6000
VNE indicated	km/h	250	243	230	218

Altitude	ft	0-10000	13000	16000	20000
VNE indicated	kts.	135	131	124	117

3. Dump the water ballast before you reach freezing altitude at +2°C (36°F) or descend to lower altitudes.

4.10 **Flight in rain** (also see sect. 3.5)
With rain, the stall speed and landing speeds are increased. The rate of sink of the aircraft also increases remarkable.